
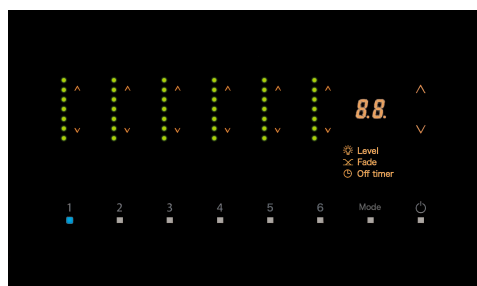


# Scene Controller

6 dimming channel, 6 dimming circuit

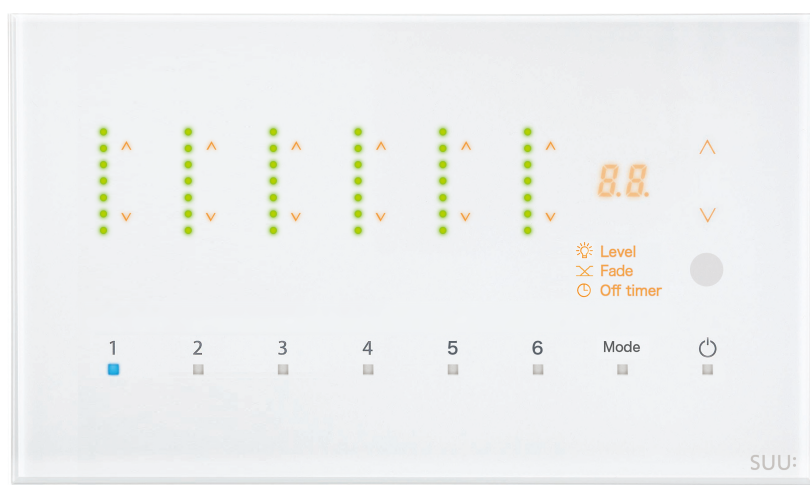


## FMD-0606WW/WB

### Specification

Dimensions	w 208mm·h 120mm
Dimming Channel	6 channel
Dimming Circuits	6 circuit(phase control) + 6 circuit(0-10V DC control)
Loading Capacity	total 1200VA, circuit 450VA
Input Power Supply	AC200V~AC240V
Number of Scene	6 scene
Fade Time	0~60sec
Off-timer	10sec·30sec·60sec·10min·30min·60min
Color	white / black
Acceptable Load	phase control / 0-10V DC control

<Notice>

450 VA / circuit	1200 VA / total	6 channel	6 phase control circuit	6 0-10V DC control circuit	6 scene
Incandescent/ halogen	LED phase control	LED 0-10V DC control	Fluorescent batten 0-10V DC control		

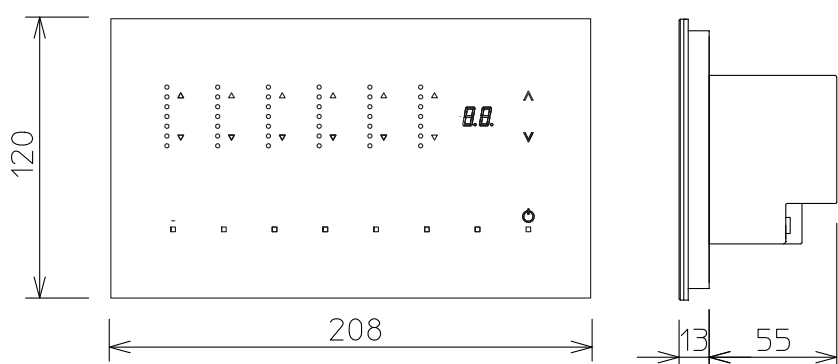

- <Notice>
- Some amount of heat felt at the unit cover is normal.
  - Miss-wiring may create short circuit and overload, causing permanent damage to a semiconductor device used in the unit.
  - This unit cannot be used for controlling lamps with dimmer function built in.

## Connection

